



## Single and Dual Windshield Lights



### Single, Permanent

Includes shroud, bracket and bare wires

- 6 LED, Solid or Split Colors
- 9 LED, Solid Colors
- 12 LED, Solid or Dual Colors
- 18 LED, Tri Colors - Blue/Red/Amber or Blue/Red/White
- 9 LED, Solid Color - Amber, High Output

- #ENFSWP1(x)
- #ENFSWP2(x)
- #ENFSWP3(x)
- #ENFSWP4(XXX)
- #ENFSWP2A-PC

### Single, Suction Cup

Includes shroud, bracket and 12 volt cig plug with 11.5 foot cord

- 6 LED, Solid or Split Colors
- 9 LED, Solid Colors
- 12 LED, Solid or Dual Colors
- 18 LED, Tri Colors - Blue/Red/Amber or Blue/Red/White
- 9 LED, Solid Color - Amber, High Output

- #ENFSWS1(x)
- #ENFSWS2(x)
- #ENFSWS3(x)
- #ENFSWS4(XXX)
- #ENFSWS2A-PC



### Dual Side-by-Side, Permanent

Includes shroud, bracket and bare wires

- 6 LED, Solid or Split Colors
- 9 LED, Solid Colors
- 12 LED, Solid or Dual Colors
- 18 LED, Tri Colors - Blue/Red/Amber or Blue/Red/White
- 9 LED, Solid Color - Amber/Amber, High Output

- #ENFDWP1(xx)
- #ENFDWP2(xx)
- #ENFDWP3(xx)
- #ENFDWP4(XXX)
- #ENFDWP2AA-PC

### Dual Side-by-Side, Suction Cup

Includes shroud, bracket and 12 volt cig plug with 11.5 foot cord

- 6 LED, Solid or Split Colors
- 9 LED, Solid Colors
- 12 LED, Solid or Dual Colors
- 18 LED, Tri Colors - Blue/Red/Amber or Blue/Red/White
- 9 LED, Solid Color - Amber/Amber High Output

- #ENFDWS1(xx)
- #ENFDWS2(xx)
- #ENFDWS3(xx)
- #ENFDWS4(XXX)
- #ENFDWS2AA-PC

## Features

- > New vehicle design integration
- > Single, Split, Dual and Tri-Color capability
- > 6, 9, 12 and 18 LED counts
- > Steady-burn white capability
- > Separate color control capability
- > Secondary function can be either flashing or steady-burn

## Configurable Features

- > nFORCE is the only perimeter lighting product line on the market that can be specifically tailored to your unique requirements.

Visit [www.soundoffsignal.com/product/nforce-windshield-lights/](http://www.soundoffsignal.com/product/nforce-windshield-lights/) for an order form when ordering custom options and for additional information.



# Single and Dual Windshield Lights

[continued]

Replace (x), (xx) or (xxx) in the Order Number for Standard Color Selection

Solid Colors: A = B = R = W =

Dual Colors: D = E = F = J or JJ = Tri-Colors: BRA = BRW =


**Single**

Solid Colors (x) = A, B, R or W  
 6 LED Split Colors (x) = J  
 9 LED Solid Colors (x) = A, B, R or W  
 12 LED Dual Colors (x) = D, E, F or J  
 18 LED Tri-Colors (xxx) = BRA (blue/red/amber) or BRW (blue/red/white)

**Dual Side-by-Side**

Solid Colors (xx) = AA, AW, BA, BB, BW, RA, RB, RR or RW  
 6 LED Split Colors (xx) = JJ  
 9 LED Solid Colors (xx) = A, B, R or W  
 12 LED Dual Colors (xx) = JJ  
 18 LED Tri-Colors (xxx) = BRA (blue/red/amber) or BRW (blue/red/white)

### Module LED Color Patterns

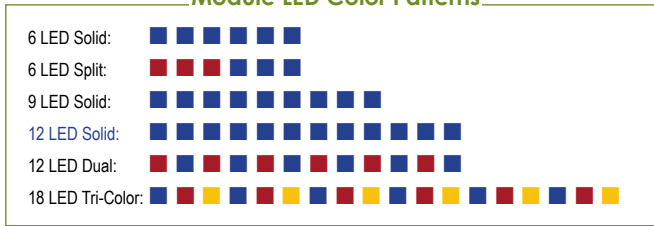

### Technical Specifications

FLASH PATTERNS	12 Single color patterns, 14 Dual or 14 Tri-color patterns
INPUT VOLTAGE	10-16 Vdc
CURRENT DRAW PER MODULE	
6 LED Single Color	< 1.0 Amp @ 12.8Vdc
6 LED Split Color	< 1.0 Amp @ 12.8Vdc
9 LED Single Color	< 1.5 Amps @ 12.8Vdc
12 LED Single Color	< 2.0 Amps @ 12.8Vdc
12 LED Split Color	< 1.0 Amp @ 12.8Vdc
18 LED Tri-Color	< 1.0 Amp @ 12.8Vdc
LIGHT SYNC	24 single lightheads
OPERATING TEMPERATURE	-40° C to +65° C / -40° F to +149° F
DIMENSIONS	Single: 6.80" (17.27cm) L x 1.43" (3.6 cm) H x 5" (12.7 cm) D Dual Side-by-Side: 11.35" (28.8 cm) L x 1.43" (3.6 cm) H x 5" (12.7 cm) D
CERTIFICATIONS	SAE J595, Class 1 certified; CA Title 13, Article 22 compliant and EMC certified, 72/245/EEC
WARRANTY	Five-year

